

客電ダウンライト アドレス

		401	402	403	404	405	406	
474								485
473		408	407	412	411	416	415	486
476		409	410	413	414	417	418	487
475		420	419	424	423	428	427	488
478		421	422	425	426	429	430	489
477		432	431	436	435	440	439	490
480		433	434	437	438	441	442	491
479		444	443	448	447	452	451	492
482		445	446	449	450	453	454	493
481		456	455	460	459	464	463	494
484		457	458	461	462	465	466	495
483		468	467	470	469	472	471	496

3000K° LED 4000K° LED



舞台 6 面使用時の客電

下がり天井エリア

103

104

30C直
30C直



DMX B


30C直

30C直

30C直

DMX A
DMX B

3相3線75A

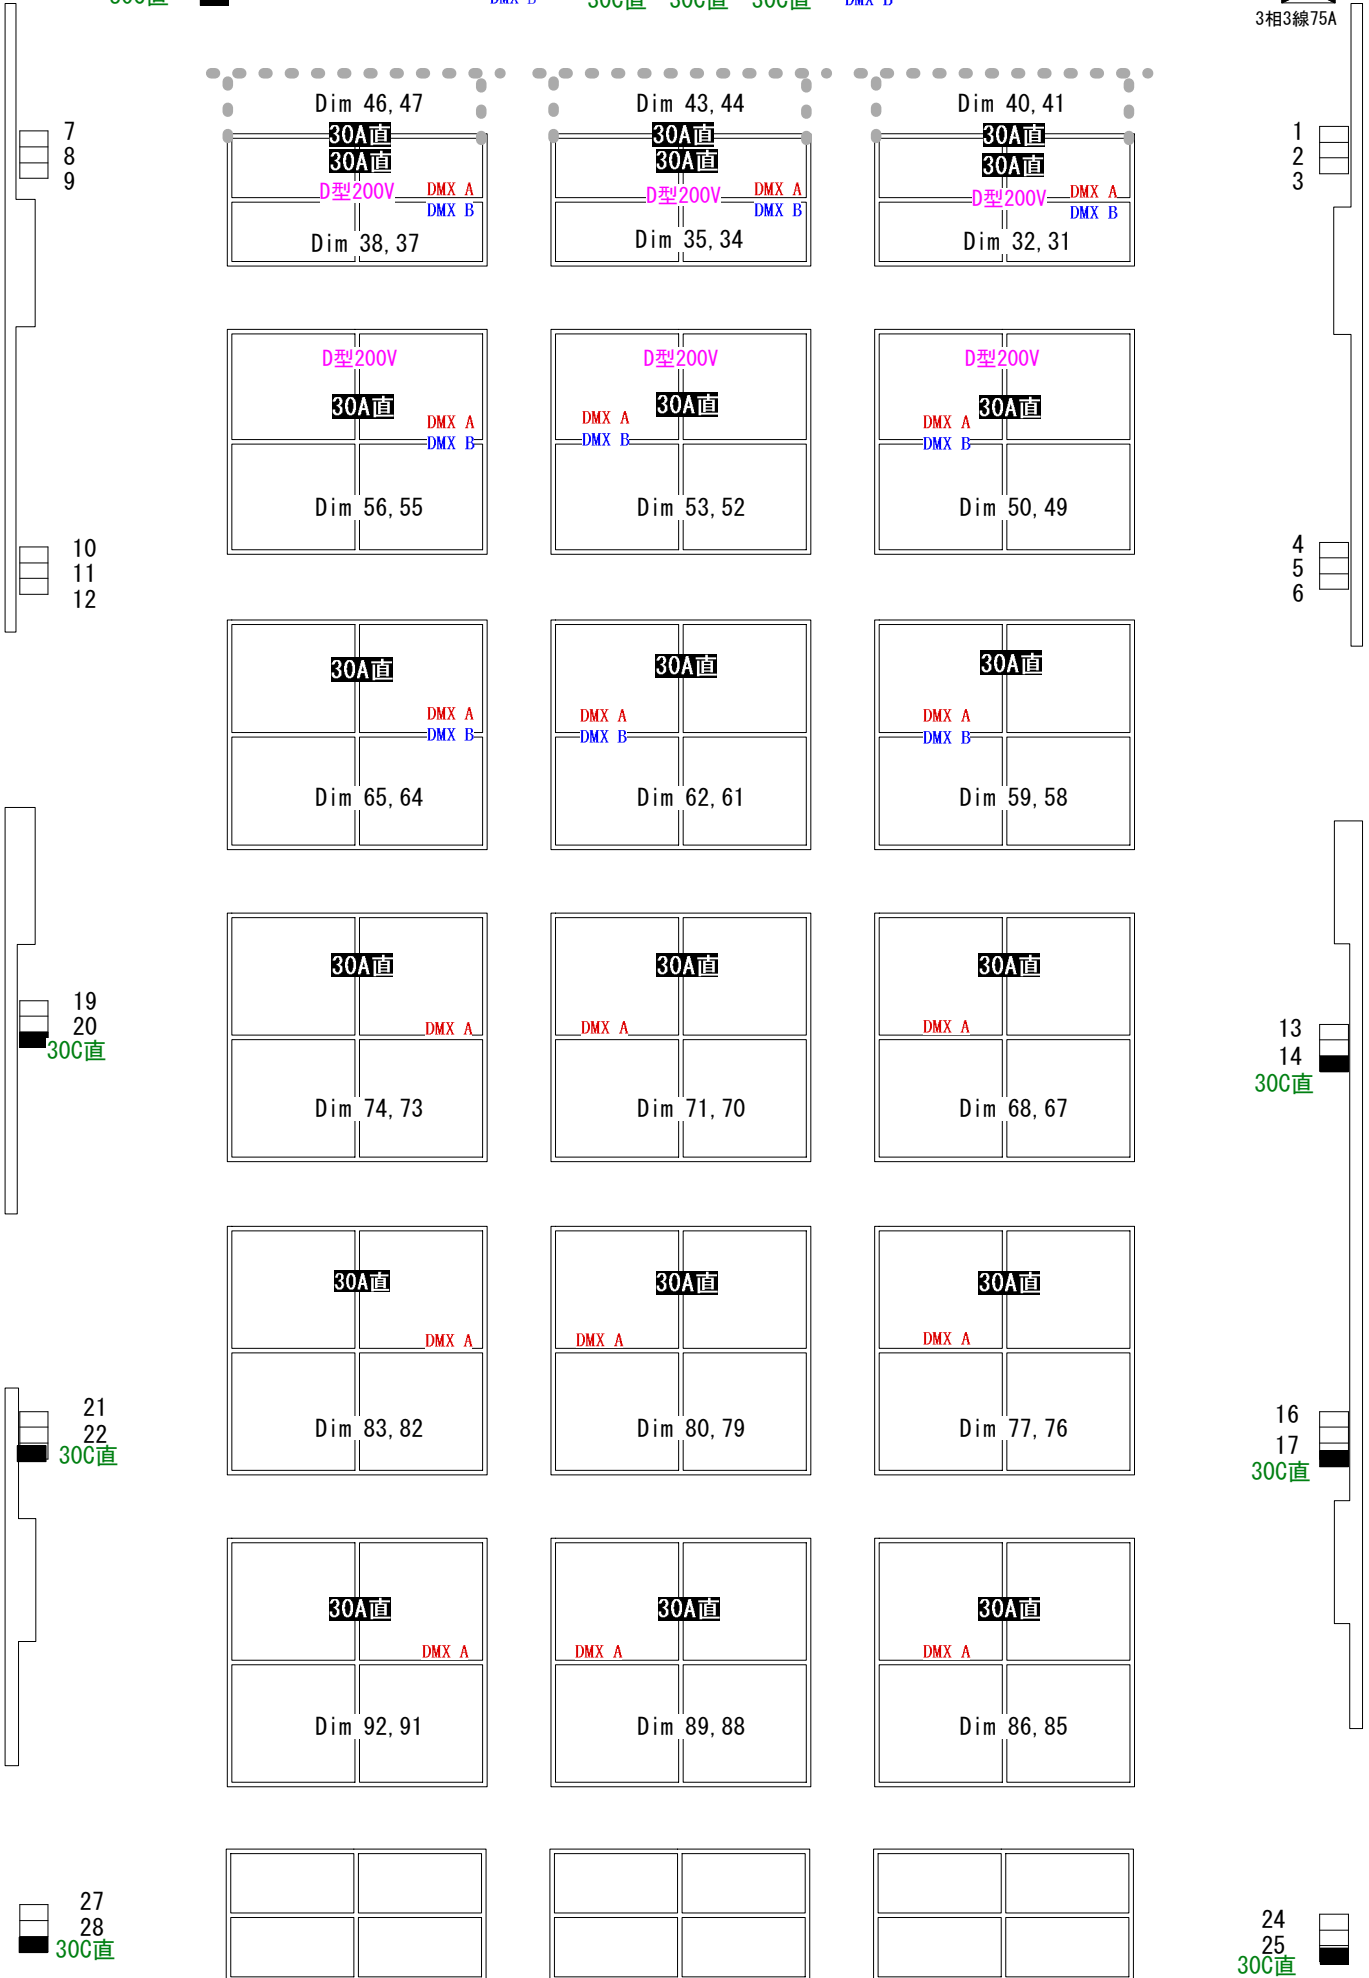

グリッド耐荷重150kg

グリッド30A直 T型4口

DMX input

A
B
C (Dim)